


RELEASE / REVISION			
SYM	DESCRIPTION	DATE	APPROVAL
⑥	REL. PER ENGR. REL #		

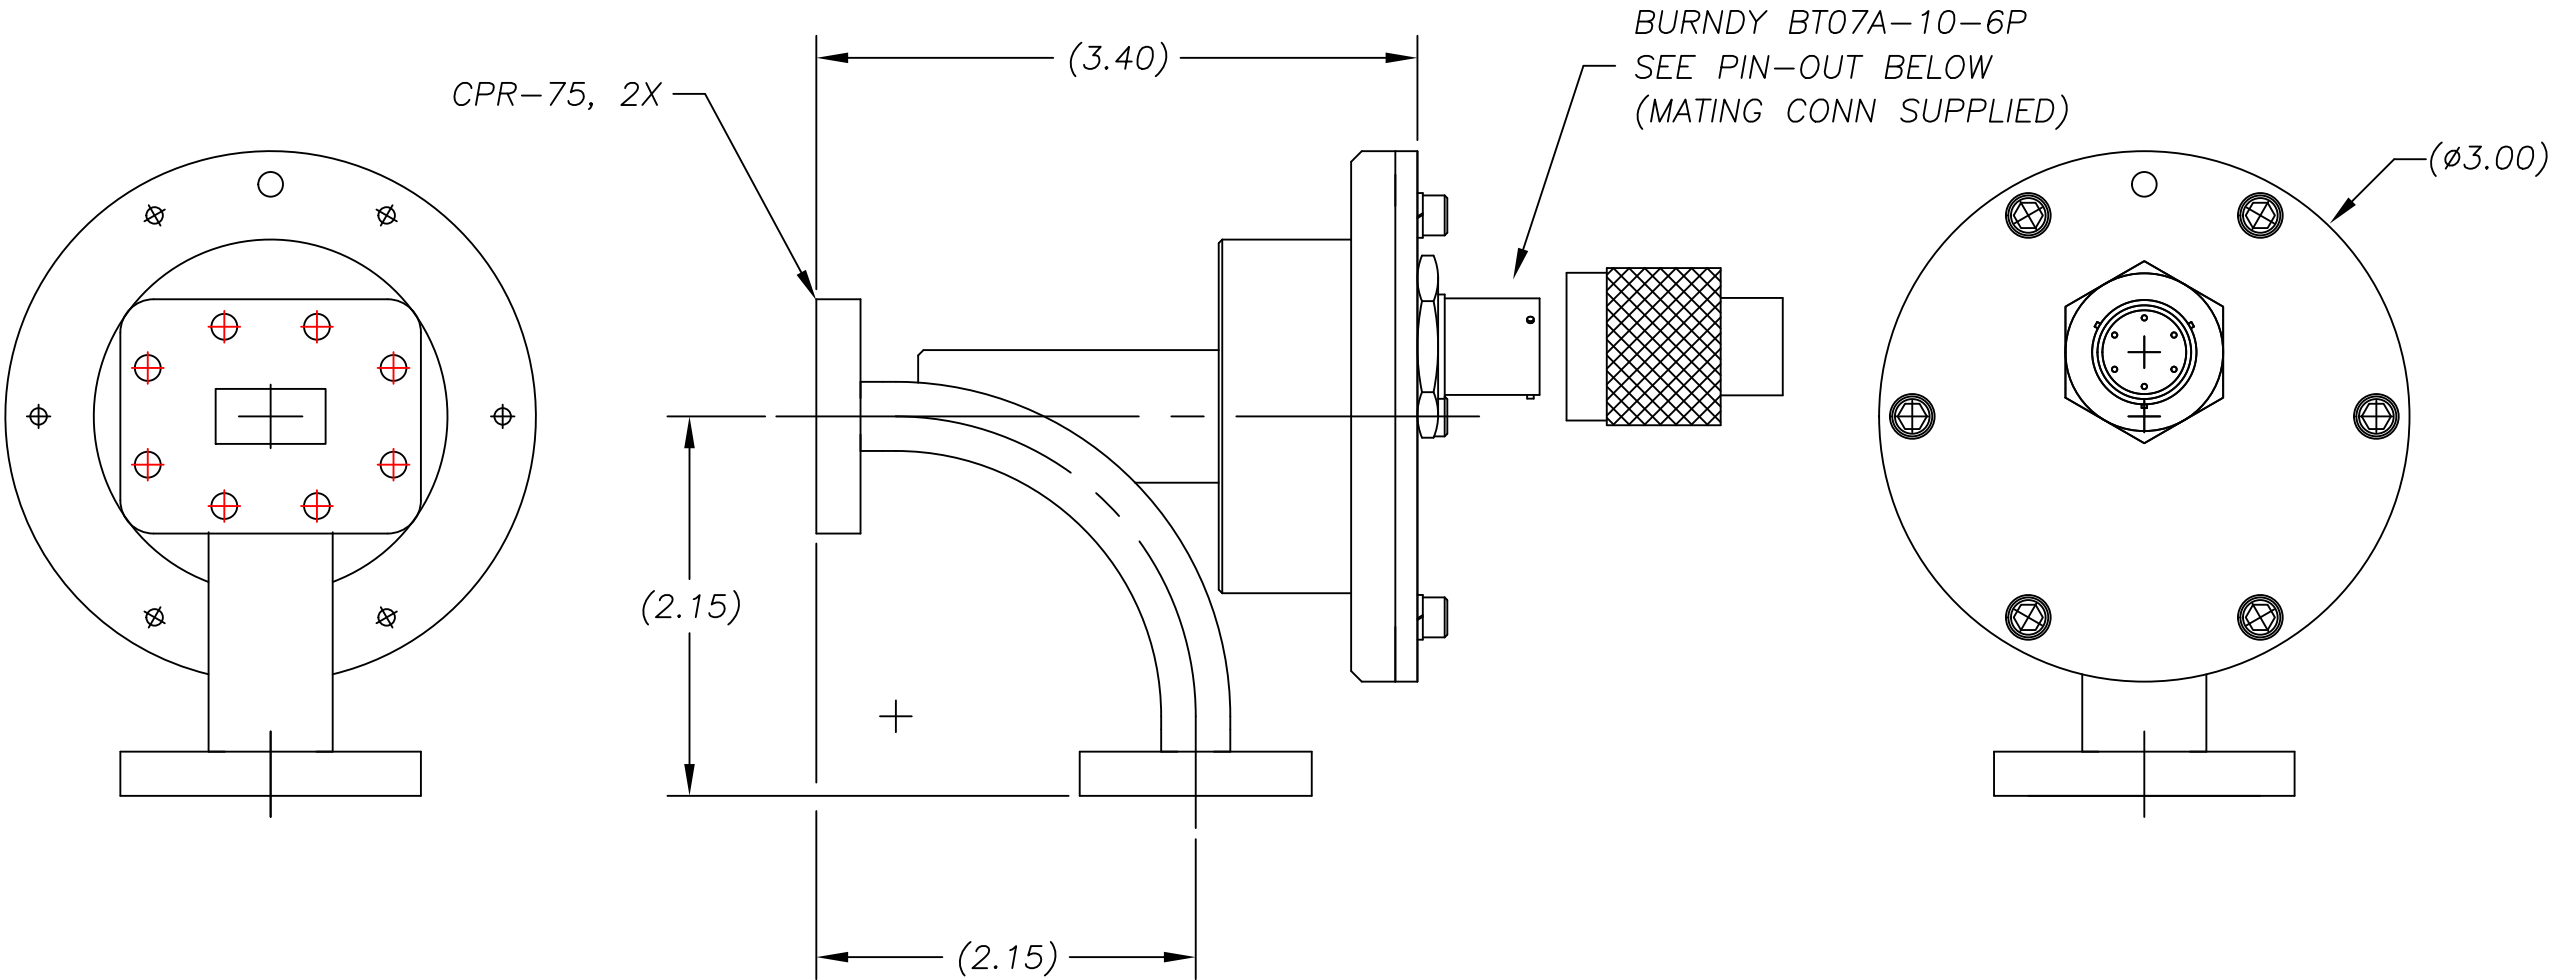

PIN	FUNCTION
A	SUPPLY VOLTAGE (+15 TO +28 VDC)
B	COMMON
C	TEST INPUT (+15 TO +28 VDC)
D	OUTPUT (+15 TO +28 VDC, ARMED < 1.6 VDC, FIRED)
E	NO CONNECTION
F	OUTPUT (SAME AS PIN D)

QTY REQ'D		PART OR IDENT. NUMBER		NOMENCLATURE OR DESCRIPTION		ITEM NO.	
LIST OF MATERIALS OR PARTS LIST							
UNLESS OTHERWISE SPECIFIED		BY		DATE		CML ENGINEERING SALES, INC. 2020 RIDGECREST PL, ESCONDIDO, CA 92029	
125 MAX. ALL MACHINED SURFACES PER MIL-STD-10A. BREAK ALL SHARP EDGES 1/32 MAX. REMOVE ALL BURRS.		DR					
		CHK					
		ENGR					
		MFG					
TOLERANCES:		Q.A.				MODEL 6255-00 DRAWING NO. 6255-00-0000 REV. 0 SCALE 1=1 WT. SHEET 1 of 1	
DECIMALS		FRACTIONS		THIS DRAWING IS PROPERTY OF CML ENGINEERING. REPRODUCTION PROHIBITED WITHOUT WRITTEN PERMISSION.			
.X ±.05		±1/16					
.XX ±.02		ANGLES					
.XXX ±.005		±0°30'					
MATERIAL:		FINISH:					
—		—					
—		—					
—		—					

0		
REV.	NEXT ASSY	REF. NO.