


RELEASE / REVISION			
SYM	DESCRIPTION	DATE	APPROVAL
⑥	REL. PER ENGR. REL # 664	4/95	H.J.MOHR

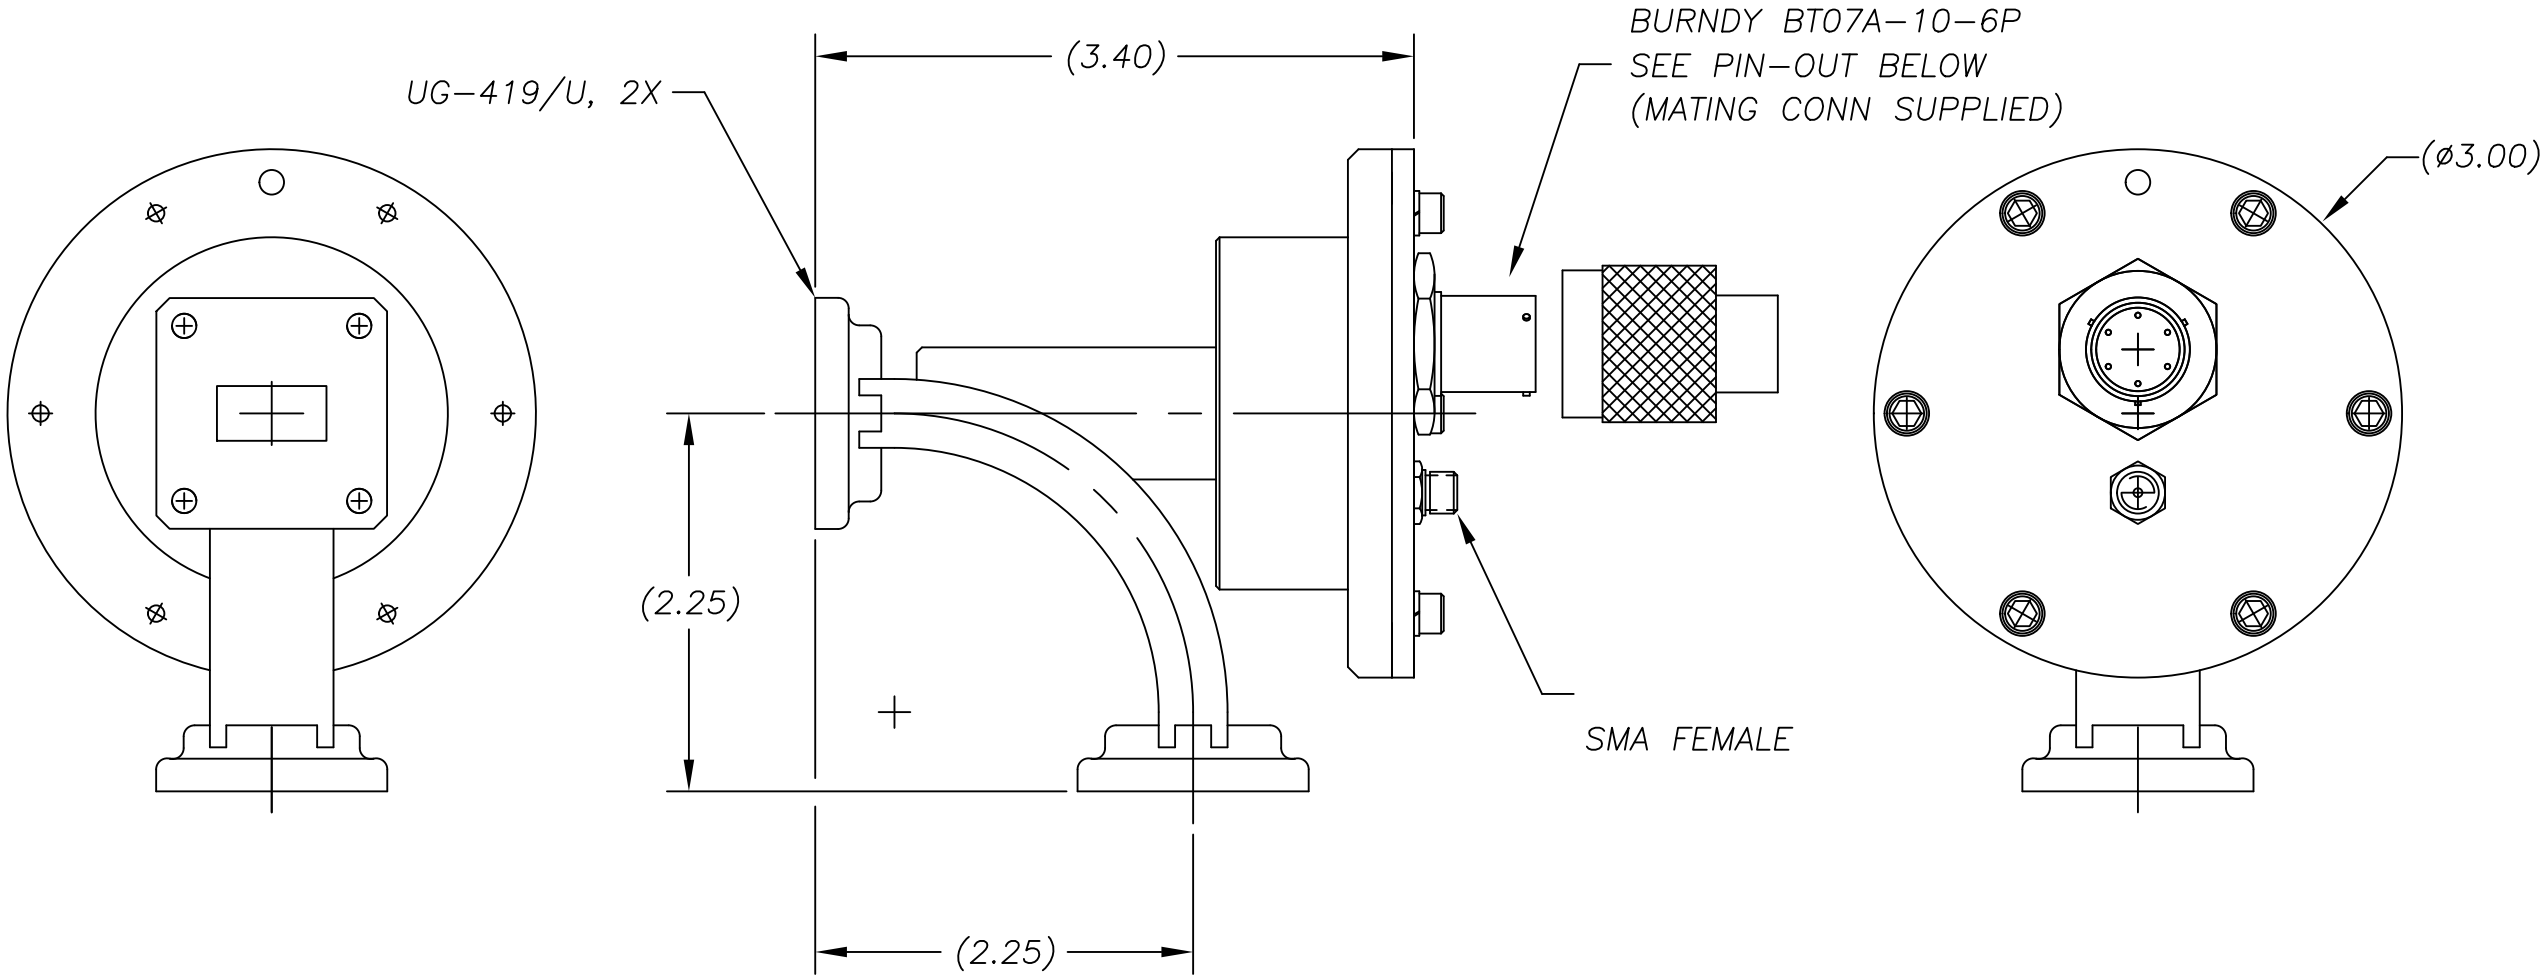

PIN	FUNCTION
A	SUPPLY VOLTAGE (+12 TO +31 VDC)
B	COMMON
C	TEST INPUT (+5 TO +24 VDC)
D	OUTPUT (+15 TO +24 VDC, ARMED < 1.6 VDC, FIRED)
E	NO CONNECTION
F	OUTPUT (SAME AS PIN D)

0		
REV.	NEXT ASSY	REF. NO.

QTY REQ'D		PART OR IDENT. NUMBER		NOMENCLATURE OR DESCRIPTION		ITEM NO.	
LIST OF MATERIALS OR PARTS LIST							
UNLESS OTHERWISE SPECIFIED		BY		DATE		CML ENGINEERING SALES, INC. 2020 RIDGECREST PL, ESCONDIDO, CA 92029	
125 MAX. ALL MACHINED SURFACES PER MIL-STD-10A.		DR <i>Jim Miller</i>		3/95			
BREAK ALL SHARP EDGES 1/32 MAX. REMOVE ALL BURRS.		CHK					
		ENGR <i>H.J. MOHR</i>		4/95			
		MFG					
TOLERANCES:		Q.A. <i>C.H.</i>		4/95		MODEL 6260-01	
DECIMALS		FRACTIONS		THIS DRAWING IS PROPERTY OF CML ENGINEERING. REPRODUCTION PROHIBITED WITHOUT WRITTEN PERMISSION.			
.X ±.05		±1/16					
.XX ±.02		ANGLES					
.XXX ±.005		±0°30'					
MATERIAL:		FINISH:		DRAWING NO.		REV.	
—		—		6260-01-0000		0	
—		—		SCALE 1=1		SHEET 1 of 1	
—		—		WT.			

CML ENGINEERING SALES, INC.
2020 RIDGECREST PL, ESCONDIDO, CA 92029

MODEL 6260-01